

Tarek Sobh  
Khaled Elleithy  
*Editors*

12582

# Advances in Systems, Computing Sciences and Software Engineering

Proceedings of SCSS 2005

 Springer



Sobh  
Elleithy  
Editors

**Advances in Systems, Computing Sciences and Software Engineering  
Proceedings of SCSS 2005**

The conference proceedings of the International Conference on Systems, Computing Sciences and Software Engineering include a set of rigorously reviewed world-class manuscripts addressing and detailing state-of-the-art research projects in the areas of Computer Science, Software Engineering, Computer Engineering, and Systems Engineering and Sciences.

The International Conference on Systems, Computing Sciences and Software Engineering (SCSS 2005) was part of the International Joint Conferences on Computer, Information and Systems Sciences and Engineering (CISSE 2005).

CISSE 2005, the World's first Engineering/Computing and Systems Research E-Conference was the first high-caliber Research Conference in the world to be completely conducted online in real-time via the internet.

All aspects of the conference were managed on-line; not only the reviewing, submissions and registration processes; but also the actual conference. Conference participants - authors, presenters and attendees - only needed an internet connection and sound available on their computers in order to be able to contribute and participate in this international ground-breaking conference. The on-line structure of this high-quality event allowed academic professionals and industry participants to contribute work and attend world-class technical presentations based on rigorously refereed submissions, live, without the need for investing significant travel funds or time out of the office. Suffice to say that CISSE received submissions from more than 50 countries, for whose researchers, this opportunity presented a much more affordable, dynamic and well-planned event to attend and submit their work to, versus a classic, on-the-ground conference.

The CISSE conference audio room provided superb audio even over low speed internet connections, the ability to display PowerPoint presentations, and cross-platform compatibility (the conferencing software runs on Windows, Mac, and any other operating system that supports Java). In addition, the conferencing system allowed for an unlimited number of participants, which in turn granted CISSE the opportunity to allow all participants to attend all presentations, as opposed to limiting the number of available seats for each session.

ISBN 1-4020-5262-6



9 781402 052620

The implemented conferencing technology, starting with the submission & review system and ending with the online conferencing capability, allowed CISSE to conduct a very high quality, fulfilling event for all participants.

See: [www.cisse2005.org](http://www.cisse2005.org), section on SCSS

springer.com

# Advances in Systems, Computing Sciences and Software Engineering

Proceedings of SCSS 2005

Edited by

Tarek Sobh

*School of Engineering, University of Bridgeport, USA*

Khaled Elleithy

*School of Engineering, University of Bridgeport, USA*

 Springer

## Acknowledgements

The International Conference on Systems, Computing Sciences and Software Engineering (SCSS 2005) would not have been possible to conduct without the work, efforts and dedication of many individuals and organizations.

The editors would like to acknowledge the technical co-sponsorship provided by the University of Bridgeport and the Institute of Electrical and Electronics Engineers (IEEE). We would like to express our gratitude to Prof. Toshio Fukuda, the Chair of the International Advisory Committee and Prof. Srinivas Ramaswamy, the SCSS 2005 Conference Chair. The efforts of the CISSE Webmaster, Mr. Andrew Rosca, have been instrumental in the success of the conference. The work of Mr. Tudor Rosca in managing and administering the conference on-line presentation system has been crucial in conducting the world's first real-time on-line high caliber research conference. We also wish to recognize the roles played by Ms. Susan Kristie and Mr. Sarosh Patel, our administrative and technical support team.

Finally, and most importantly, we would like to express our thanks to our colleagues, the reviewers and technical committee members who did an exceptional job in reviewing the submitted manuscripts. In particular, we would like to acknowledge the contributions of Abdelaziz Almulhem, Ehab Elmallah, Julius Dichter, Michael Lemmon, Mohammed Younis, Natalia Romalis and Rodney Roberts.



## Preface

### Advances in Systems, Computing Sciences and Software Engineering

This book includes the proceedings of the International Conference on Systems, Computing Sciences and Software Engineering (SCSS'05). The proceedings are a set of rigorously reviewed world-class manuscripts addressing and detailing state-of-the-art research projects in the areas of computer science, software engineering, computer engineering, systems sciences and engineering, information technology, parallel and distributed computing and web-based programming.

SCSS'05 was part of the International Joint Conferences on Computer, Information, and Systems Sciences, and Engineering (CISSE'05) ([www.cisse2005.org](http://www.cisse2005.org)), the World's first Engineering/Computing and Systems Research E-Conference.

CISSE'05 was the first high-caliber Research Conference in the world to be completely conducted online in real-time via the internet. CISSE'05 received 255 research paper submissions and the final program included 140 accepted papers, from more than 45 countries. The concept and format of CISSE'05 were very exciting and ground-breaking. The PowerPoint presentations, final paper manuscripts and time schedule for live presentations over the web had been available for 3 weeks prior to the start of the conference for all registrants, so they could choose the presentations they want to attend and think about questions that they might want to ask. The live audio presentations were also recorded and were part of the permanent CISSE archive, which also included all power point presentations and papers.

SCSS'05 provided a virtual forum for presentation and discussion of the state-of the-art research on Systems, Computing Sciences and Software Engineering. The virtual conference was conducted through the Internet using web-conferencing tools, made available by the conference. Authors presented their PowerPoint, audio or video presentations using web-conferencing tools without the need for travel. The Conference sessions were broadcasted to all the conference participants, where session participants were able to interact with the presenter during the presentation and (or) during the Q&A slot that followed the presentation. This international conference was held entirely on-line. The accepted and presented papers were made available after the conference both on a CD and as a book publication by Springer.

The SCSS conference audio room provided superb audio even over low speed internet connections, the ability to display PowerPoint presentations, and cross-platform compatibility (the conferencing software runs on Windows, Mac, and any other operating system that supports Java). In addition, the conferencing system allowed for an unlimited number of participants, which in turn granted us the

opportunity to allow all SCS2 participants to attend all presentations, as opposed to limiting the number of available seats for each session.

This volume of the conference proceedings includes 66 papers that were presented in the conference. The papers cover an interesting range of topics such as fuzzy algorithms, parallel computing, multimedia applications, grid computing, distributed software programming, semantic web, web mining, semantic web knowledge management, pervasive grids, non visual interfaces, character recognition, and self evolving software.

We hope that you will find the selected papers interesting and covering the state-of-the-art advances in the area of Systems, Computing Sciences and Software Engineering. We are looking forward to your participation in CISSE'06 ([www.cisse2006.org](http://www.cisse2006.org)).

#### **Editors**

**Prof. Tarek Sobh**  
Vice Provost for Graduate  
Studies & Research  
Dean, School of Engineering  
University of Bridgeport

**Prof. Khaled Elleithy**  
Associate Dean, School of Engineering  
Dept. of Computer Science  
and Engineering  
University of Bridgeport

# Performance Comparison of Two Identification Methods for Analysis of Head Related Impulse Responses

Kenneth John Faller II<sup>1</sup>, Armando Barreto<sup>1</sup>, Navarun Gupta<sup>2</sup> and Naphtali Rishe<sup>3</sup>

Electrical and Computer Engineering Department<sup>1</sup> and School of Computer Science<sup>3</sup>  
Florida International University  
Miami, FL 33174 USA

Department of Electrical and Computer Engineering<sup>2</sup>  
University of Bridgeport  
Bridgeport, CT 06604 USA

**Abstract**—Head-Related Impulse Responses (HRIRs) are used in signal processing to model the synthesis of spatialized audio which is used in a wide variety of applications, from computer games to aids for the vision impaired. They represent the modification to sound due to the listener's torso, shoulders, head and pinnae, or outer ears. As such, HRIRs are somewhat different for each listener and require expensive specialized equipment for their measurement. Therefore, the development of a method to obtain customized HRIRs without specialized equipment is extremely desirable. In previous research on this topic, Prony's modeling method was used to obtain an appropriate set of time delays and a resonant frequency to approximate measured HRIRs. During several recent experimental attempts to improve on this previous method, a noticeable increase in percent fit was obtained using the Steiglitz-McBride iterative approximation method. In this paper we report on the comparison between these two methods and the statistically significant advantage found in using the Steiglitz-McBride method for the modeling of most HRIRs.

## I. INTRODUCTION

Humans have the remarkable ability to determine the location and distance of a sound source. How we are able to do this has been a topic of research for some time now. Some aspects of this topic are well understood while other aspects still elude researchers. For example, it is known that the time difference between the arrival of a sound to each ear provides a strong cue for the localization of the sound source in azimuth, while elevation is primarily determined by the perceived modification of sound that takes place in the pinnae or outer ear [1]. Many modern technologies benefit from generating synthetic sounds that have a simulated source location. Currently there are two approaches to synthetic spatial audio: multi-channel and two-channel approaches. The multi-channel approach consists of physically positioning speakers around the listener (e.g., Dolby 5.1 array). This is an effective solution but impractical for the majority of applications that utilize spatial audio. The two-channel approach is more practical because it can be implemented using digital signal processing (DSP) techniques and delivered to the user through headphones.

One such technique is the use of Head-Related Impulse Responses (HRIRs). HRIRs capture the location-dependent spectral changes that occur due to environmental (walls, chairs, etc.) and anatomical (torso, head, and outer ears or pinnae) factors [1]. This approach requires the availability of an HRIR for each ear and each position (elevation, azimuth) of the sound source. The sound signal is then convolved with the HRIR for each ear, to create a binaural sound (left channel, right channel), which gives the listener the sensation that the sound source is located at a specific point in space (Fig. 1). This ability to emulate spatial audio with only two channels has broadened its uses in several important areas: human/computer interfaces for workstations and wearable computers, sound output for computer games, aids for the vision impaired, virtual reality systems, "eyes-free" displays for pilots and air-traffic controllers, spatial audio for teleconferencing and shared electronic workspaces, and auditory displays of scientific or business data [1].

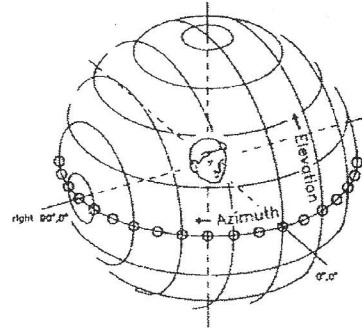


Fig. 1. Diagram of spherical coordinate system [2]

At present, the HRIRs that are used for the synthesis of spatialized audio are either generic or individual. Generic HRIRs are measured using a manikin head (e.g., M.I.T.'s measurements of a KEMAR Dummy-Head Microphone [3]) or using a limited number of subjects to represent the general population (e.g., the CIPIC Database [4]). Individual HRIRs



require the subject to undergo time consuming measurements with specialized equipment. Furthermore, a trained and experienced technician is necessary to operate the equipment. Unfortunately, access to the equipment necessary to measure HRIRs is limited for the general public. As a consequence, many spatialized audio systems rely on generic HRIRs, although these are known to reduce the fidelity of the spatialization and increase phenomena such as front to back reversals [5]. These reversals occur when a sound simulated in the front hemisphere is actually perceived in a symmetrical position of the back hemisphere, or vice versa.

Previous research by our group has sought to create a model to generate customized HRIRs with only a few simple measurements. The basic model that resulted from previous research comprises a single resonance feeding its output to a set of parallel paths, each with a magnification and a delay factor, which could be obtained from measurements of the head and pinnae and the use of Prony's method (Fig. 2) [5][6]. Prony's method is an algorithm for finding the coefficients for an IIR filter with a prescribed time domain impulse response. The algorithm implemented is the method described in reference [7].

During recent experimentation on this topic, Prony's method ("Prony") was substituted by the Steiglitz-McBride iteration method ("STMCB"). The STMCB method is similar to Prony in that it also tries to find an IIR filter with a prescribed time domain impulse response. The only difference is that the STMCB method attempts to minimize the squared error between the impulse response and the input signal. A noticeable improvement was observed after the substitution of Prony with STMCB for HRIR modeling. The algorithm for the STMCB method implemented is the method described in reference [8].

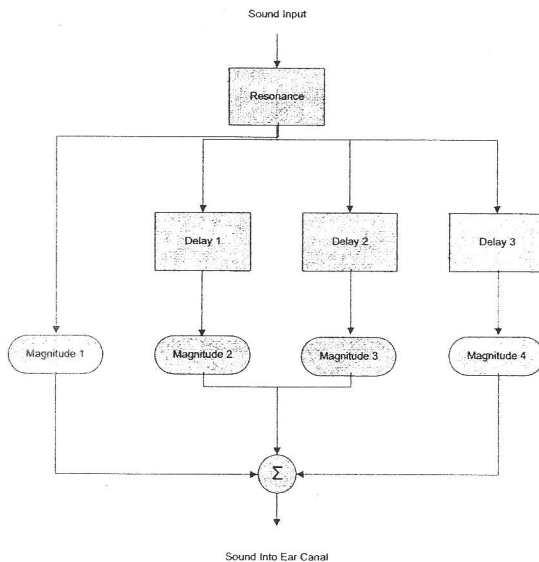


Fig. 2. Block diagram of pinna model

## II. METHODOLOGY

The following subsections describe the methodology used to compare STMCB and Prony for HRIR modeling.

### A. Best Fit Iteration Algorithm

The purpose of this experiment is to show that there is a statistically significant modeling improvement when STMCB is used for HRIR analysis instead of Prony. In order to do this, a sample population of HRIRs is necessary. Fortunately the CIPIC database, which is a database that contains HRIRs recorded at 44.1 kHz. from 45 subjects for various azimuths and elevations, is available from [1]. This database contains a large number of HRIRs and is impractical to analyze all azimuths and elevations for both ears. Hence, only HRIRs for the right ear at 0° elevation and 25 different azimuths ranging from -80° to 80° were involved in this comparison.

A Matlab® script was created to iterate through each of the CIPIC HRIRs described above. The script attempts to discover the best fit between a measured HRIR and the HRIR that can be reconstructed by adding the partial 2<sup>nd</sup> order responses (equivalent to a full path from top to bottom in Fig. 2) extracted from the HRIR using both Prony and STMCB. Both of these methods can estimate a full signal with a smaller segment of the original signal. Furthermore, considering that the original HRIR is believed to consist of a primary resonance and at least two delayed echoes [5], processing the entire HRIR with Prony or STMCB at once would result in a large approximation error sequence, as defined in equation (1). Therefore, data "windows" of increasing sizes have to be tried iteratively, to define each of the 2<sup>nd</sup> order "echoes" that make up the HRIR, as indicated in Fig. 3. The sizes of the windows to use are determined by iteration, subject to the constraints found in previous work in this area [5]: The first window is at least 5 samples which results in window1 in Fig. 3 starting at 5. Additionally, the windows are not allowed to grow wider than 10 samples.

In this comparison study, the reconstructed HRIRs will only consist of three 2<sup>nd</sup> order responses that are obtained from Prony or STMCB. These are the "primary" response and two delayed responses, referred to as "echoes." While there may be other late components in the HRIRs, such as the third echo recovered in [5], it is clear that these first three components contain most of the power in the HRIR and were selected as the basis of comparison to keep the number of iterations manageable. Once the primary response and echoes are determined, the reconstructed HRIR is created by adding the extracted responses at the determined delays and comparing the resulting sequence to the original HRIR, in terms of mean square (MS) value:

$$\text{Error} = \text{Original HRIR} - \text{Reconstructed HRIR}, \quad (1)$$

$$\text{Fit} = [1 - \{\text{MS}(\text{Error})/\text{MS}(\text{Original HRIR})\}]. \quad (2)$$

The percentage fit ("fit") between the original HRIR and the reconstructed HRIR was calculated for every subject and every azimuth, and used as the figure of merit to compare the performance of STMCB and Prony for this modeling task.

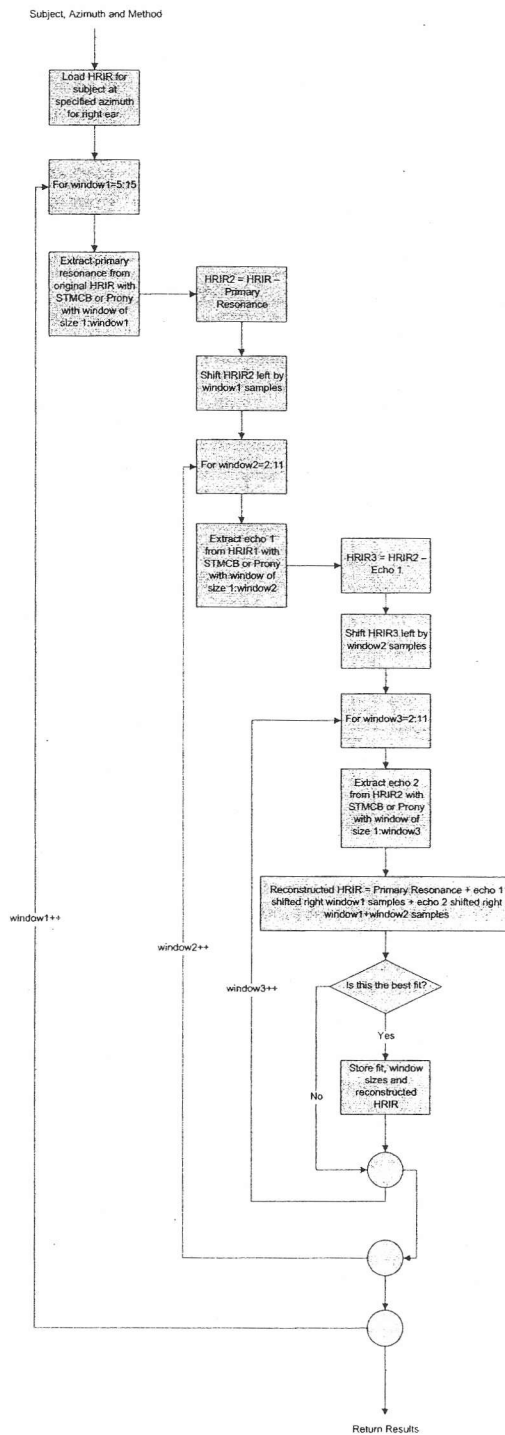


Fig. 3. Flow chart for the iterative process that determines best fit.

### B. Statistical Analysis Algorithm

Additional Matlab® scripts were created to statistically analyze the results of the previous section. Matched- $t$  tests were utilized in order to determine statistical significance of performance differences observed when the modeling task used Prony or STMCB, for each given source azimuth. The fit obtained through STMCB was subtracted from the fit obtained through Prony, for each azimuth. The 45 differences for one azimuth form a single sample and there were 25 samples (i.e., 25 azimuths) in total.

To assess whether the STMCB significantly improved the fit percentage, the following hypotheses were tested:

$$H_0: \mu = 0. \quad (3)$$

$$H_a: \mu > 0. \quad (4)$$

Here  $\mu$  is the mean improvement that would be achieved by using STMCB over Prony in the modeling process. The null hypothesis says that no improvement occurs, and  $H_a$  says that the fit from STMCB is higher on average.

In this case, the one-sample  $t$  statistic is:

$$t = \frac{\bar{x} - 0}{s / \sqrt{n}}, \quad (5)$$

where  $\bar{x}$  is the sample mean,  $s$  is the standard deviation and  $n$  is the sample size.

The results of the significance test will determine if STMCB outperformed the Prony method for HRIR analysis. Unfortunately, the size of the improvement cannot be determined from these results. A statistically significant but very small improvement would not be sufficient to claim that STMCB is a superior method. A confidence interval is used to remedy this problem. The confidence interval will display how much STMCB improved over Prony with a margin of error:

$$\bar{x} \pm t * \frac{s}{\sqrt{n}}. \quad (6)$$

The procedure followed and a complete example implementation is available in [9].

### III. RESULTS AND DISCUSSION

The following section will overview and discuss the results obtained. Table 1 displays the mean fits for both STMCB and Prony. The "Gain" column is calculated by subtracting the Prony column from the STMCB column. For example, at azimuth  $-80^\circ$  the fit improved from 81.20% (with Prony) to 87.57% (with STMCB), which results in a 6.36% gain.

TABLE 1  
MEAN FIT OF PRONY AND STMCB

Azimuth (°)	Prony	STMCB	Gain
-80	81.20%	87.57%	6.36%
-65	75.80%	80.86%	5.05%
-55	70.83%	77.97%	7.14%
-45	69.42%	76.04%	6.61%
-40	68.17%	75.05%	6.88%
-35	70.15%	76.61%	6.45%
-30	68.09%	73.50%	5.41%
-25	68.48%	73.53%	5.05%
-20	69.35%	73.82%	4.46%
-15	66.90%	71.48%	4.58%
-10	65.72%	70.49%	4.77%
-5	61.78%	68.48%	6.70%
0	61.20%	66.52%	5.33%
5	59.98%	65.87%	5.89%
10	58.79%	63.22%	4.43%
15	60.21%	63.49%	3.28%
20	60.07%	62.08%	2.01%
25	60.18%	66.71%	6.53%
30	63.31%	66.96%	3.65%
35	63.04%	72.46%	9.42%
40	68.84%	75.00%	6.15%
45	67.71%	75.92%	8.21%
55	74.76%	82.13%	7.38%
65	77.05%	85.49%	8.44%
80	82.73%	88.66%	5.93%

TABLE 2  
RESULTS OF MATCHED *t* PAIR PROCEDURE

Azimuth (°)	Null Hypothesis	p	t
-80	1	9.356E-11	8.445E+00
-65	1	9.716E-03	2.704E+00
-55	1	1.092E-03	3.496E+00
-45	1	3.337E-06	5.319E+00
-40	1	4.020E-09	7.311E+00
-35	1	2.176E-11	8.895E+00
-30	1	7.245E-06	5.086E+00
-25	1	3.127E-06	5.339E+00
-20	1	2.527E-04	3.982E+00
-15	1	2.440E-04	3.993E+00
-10	1	3.970E-05	4.567E+00
-5	1	5.826E-06	5.152E+00
0	1	7.957E-04	3.603E+00
5	1	2.299E-04	4.013E+00
10	0	5.191E-02	1.998E+00
15	0	1.717E-01	1.390E+00
20	0	3.411E-01	9.624E-01
25	1	7.808E-04	3.610E+00
30	1	2.388E-02	2.340E+00
35	1	2.726E-07	6.063E+00
40	1	7.363E-05	4.375E+00
45	1	4.562E-08	6.591E+00
55	1	4.130E-10	7.993E+00
65	1	8.665E-09	7.082E+00
80	1	9.702E-06	4.998E+00

\* Degrees of freedom (df) is 44

To investigate the statistical significance of this apparent improvement achieved by using STMCB, the fit values associated with the HRIRs from each of the azimuth values studied were processed with the "ttest" command in Matlab®. This command performs a t-test of the hypothesis that the data submitted to it (in this case, the fit differences between STMCB and Prony) comes from a distribution with a pre-specified mean (in this case 0). The command provides the values of the t-statistic, as well as the associated p-value, i.e., the probability that the value of the t-statistic is equal to or more extreme than the observed value by chance, under the null hypothesis (mean difference = 0). Additionally, the command provides both limits (CI1 and CI2) of a 95% confidence interval on the mean [10]. Table 2 summarizes the p-value and t-statistic results, for each population of fit differences, by azimuth. The second column of this table ("Null Hypothesis") displays a flag that summarizes the result of the test, in terms of significance. If the flag is "0", it means that the null hypothesis cannot be rejected in those cases, since the difference is not significant ( $p > 0.05$ ). If the flag is "1", it means that null hypothesis is rejected, with  $p < 0.05$ , i.e., for these azimuths the use of STMCB resulted in a significant improvement over the use of Prony.

As seen in Table 2, the improvement in percent fit with the use of STMCB is significant for many of the azimuths studied. In fact there were only 3 azimuths in which that was not the case: 10°, 15° and 20°. For these azimuths the null hypothesis cannot be rejected, which says that no statistically significant improvement in performance has occurred. However, the vast majority of the results support the view that the use of the Steiglitz-McBride approximation methods within the iterative process outlined in Figure 3 results in improved performance, as opposed to the use of the traditional Prony method [10].

From a different point of view, a statistically significant but very small improvement could be insufficient to prefer the use of an iterative method, such as STMCB, over a single-pass method, such as the traditional Prony algorithm. To illuminate this point, Table 3 displays the improvement of fit observed for each studied azimuth in terms not only of the mean improvement, but also indicating its standard deviation, and, most importantly a 95% confidence interval ([CI1, CI2]) for this improvement.



TABLE 3  
CONFIDENCE INTERVAL AND STANDARD DEVIATION OF RESULTS

Azimuth (°)	CI 2	CI 1	Mean	SD
-80	4.845%	7.882%	6.363%	5.055E-02
-65	1.287%	8.822%	5.054%	1.254E-01
-55	3.025%	11.259%	7.142%	1.371E-01
-45	4.107%	9.117%	6.612%	8.338E-02
-40	4.984%	8.778%	6.881%	6.314E-02
-35	4.990%	7.914%	6.452%	4.866E-02
-30	3.265%	7.550%	5.408%	7.132E-02
-25	3.142%	6.952%	5.047%	6.341E-02
-20	2.204%	6.721%	4.463%	7.518E-02
-15	2.268%	6.889%	4.578%	7.691E-02
-10	2.662%	6.868%	4.765%	6.999E-02
-5	4.080%	9.323%	6.702%	8.726E-02
0	2.347%	8.303%	5.325%	9.914E-02
5	2.929%	8.841%	5.885%	9.839E-02
10	-0.038%	8.892%	4.427%	1.486E-01
15	-1.476%	8.028%	3.276%	1.582E-01
20	-2.201%	6.225%	2.012%	1.402E-01
25	2.885%	10.180%	6.533%	1.214E-01
30	0.507%	6.797%	3.652%	1.047E-01
35	6.289%	12.552%	9.421%	1.042E-01
40	3.318%	8.988%	6.153%	9.435E-02
45	5.699%	10.720%	8.210%	8.356E-02
55	5.516%	9.236%	7.376%	6.191E-02
65	6.038%	10.842%	8.440%	7.994E-02
80	3.538%	8.320%	5.929%	7.957E-02

In order to verify the validity of the percentages of fit found by the automated script employed for the comparison, a few individual modeling results were inspected. Two of these individual results are used for illustration. Figure 4 shows one original (measured) HRIR sequence (subject 24, 35° azimuth) in the top panel, as well as the reconstructed HRIRs obtained through STMCB (middle panel) and Prony (bottom panel). This figure confirms that the main morphology of the measured HRIR sequence has been preserved when the three 2<sup>nd</sup> order responses found by either STMCB or Prony were assembled together. This is in agreement with the high numerical values found by our comparison script in this case (approximately 94% for both STMCB and Prony). These results, in turn, confirm that the limitation to the modeling of just two "echoes" was not too restrictive.

In contrast, Figure 5 displays the results of approximating a different measured HRIR (subject 27, 20° azimuth). The original and reconstructed HRIR sequences appear in the same order as for Figure 4: original at the top, STMCB reconstruction in the middle, and Prony reconstruction at the bottom.

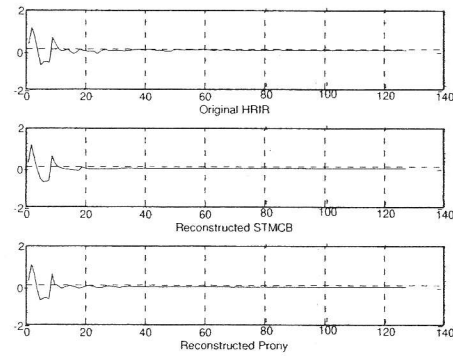


Fig. 4. Plot of the original and reconstructed HRIRs for subject 24 at 35° azimuth.

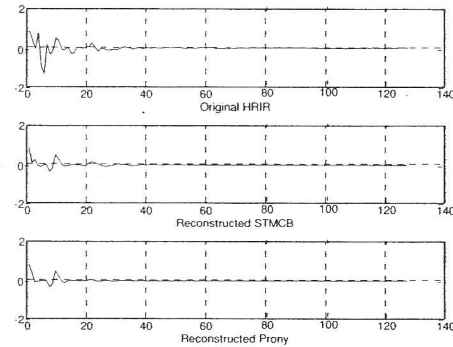


Fig. 5. Plot of the original and reconstructed HRIRs for subject 27 at 20° azimuth.

The fit for this particular case was about 28%, for both methods. As seen in the figure, the reconstructed HRIRs do not resemble the original. It would seem that both methods were able to approximate the second positive "peak" in the HRIR, appearing at a latency of about 12 sampling intervals. On the other hand, it is apparent that both STMCB and Prony minimized the error in the approximation of the first positive peak and the negative peak that immediately follows it by substituting both with a data segment that hovers around zero, which is clearly inappropriate. It is possible that the separation of these two echoes in HRIRs such as this might be very small, particularly considering the limited temporal resolution afforded by the 44.1 kHz sampling rate employed in the development of the CIPIC Database, as compared to the 96 kHz sampling rate used in other previous studies that have attempted this kind of HRIR decomposition [5][6]. However, further research is needed to ultimately pinpoint the reasons for the degradation of this technique for some azimuth values.

## IV. CONCLUSION

We have implemented a semi-automated comparison of the modeling of measured HRIRs as triads of 2<sup>nd</sup> order responses. The extraction of these responses was achieved by the Stieglitz-McBride and Prony sequence approximation methods. The fit of reconstructed HRIRs obtained by re-assembling the 2<sup>nd</sup> order responses extracted to the original measured HRIRs was used as the figure of merit to compare the advantage of using one approximation method over the other. According to the analysis of our results, it has been shown that there is a statistically significant increase in percent fit when STMCB is used rather than Prony for the modeling of most of the HRIRs studied. On the other hand, while the STMCB decomposition of HRIRs at 10°, 15° and 20° had also a better average fit than the corresponding Prony decomposition, the statistical significance of the superiority of STMCB at these three azimuths was not confirmed.

Since STMCB was significantly better than Prony for most of the azimuth angles studied, and it still had a better average fit for the three exception cases, it seems reasonable to recommend the use of STMCB signal approximation methods for HRIR modeling.

## ACKNOWLEDGMENT

This work was partially sponsored by NSF grants IIS-0308155, CNS-0520811, HRD-0317692 and CNS-0426125.

## REFERENCES

- [1] "Spatial Sound." CIPIC Interface Laboratory. University of California, Davis. 23 Aug. 2005 <<http://interface.cipic.ucdavis.edu>>.
- [2] J. C. Makous, J. C. Middlebrooks, and D. M. Green. "Directional Sensitivity of Sound-Pressure Levels in the Human Ear Canal." Journal of the Acoustical Society of America 86 (1989): 89-108.
- [3] W. Gardner, and K. Martin. HRTF Measurements of a KEMAR Dummy-Head Microphone. 18 May 1994. Massachusetts Institute of Technology. 24 Aug. 2005 <<http://sound.media.mit.edu/KEMAR.html>>.
- [4] V. R. Algazi, R. O. Duda, D. M. Thompson and C. Avendano. Workshop on Applications of Signal Processing to Audio and Acoustics, 21-24 Oct. 2001, Audio & Electroacoustics committee of the IEEE Signal Processing Society. New Paltz, NY: IEEE, 2001.
- [5] N. Gupta, "Structure-Based Modeling of Head-Related Transfer Functions Towards Interactive Customization of Binaural Sounds Systems." Ph.D. Dissertation, Florida International Univ., 2003.
- [6] A. Barreto, and N. Gupta, "Dynamic Modeling of the Pinna for Audio Spatialization", WSEAS Transactions on Acoustics and Music, 1 (1), January 2004, pp. 77 - 82.
- [7] T.W. Parks, and C.S. Burrus, Digital Filter Design, John Wiley & Sons, 1987, pp. 226-228.
- [8] K. Steiglitz, and L.E. McBride, "A Technique for the Identification of Linear Systems," IEEE Trans. Automatic Control, Vol. AC-10 (1965), pp. 461-464.
- [9] D. S. Moore, and G. P. McCabe. Introduction to the Practice of Statistics. 4th ed. New York: W. H. Freeman and Company, 2003. 501-504.
- [10] "Ttest - Statistics Toolbox." Matlab Version 7 Release 14. Mathworks Inc. 1 Sept. 2005 <<http://www.mathworks.com/>>.