



WSEAS TRANSACTIONS on SIGNAL PROCESSING

Issue 2, Volume 3, February 2007

ISSN 1790-5022

<http://www.wseas.org>

- | | |
|---|-----|
| Performance Evaluation of Mechanical Watch Movements | 139 |
| <i>S. Su, R. Du</i> | |
| Classification of Interictal EEG Data Based on Subdural Recordings | 147 |
| <i>Mercedes Cabrerizo, Malek Adjouadi, Melvin Ayala, Ilker Yaylali, Armando Barreto, Rische</i> | |
| A New Algorithm for Seizure Detection using Orthogonal Transformations | 155 |
| <i>Maria T. Tito, Malek Adjouadi, Mercedes Cabrerizo, Melvin Ayala, Ilker Yaylali, Armando Barreto, Naphtali Rische</i> | |
| On Border Artifacts and Evolution of Uncorrelated and Correlated Noise in Gaussian and Laplacian Pyramids | 163 |
| <i>Marc Hensel, Rolf-Rainer Grigat, Bjorn Eiben, Thomas Pralow</i> | |
| Noise Modeling and a Prefiltering Approach for Real-Time Estimation of Signal-Dependent Quantum Noise | 171 |
| <i>Marc Hensel, Thomas Pralow, Rolf-Rainer Grigat</i> | |
| A Novel Approach Towards the Design of Chebyshev FIR Filter with Linear Phase | 179 |
| <i>Sunil Bhooshan, Vinay Kumar</i> | |
| Wavelet-Based Robust Digital Watermarking Method Considering Human Visual Perception | 185 |
| <i>Manabu Shinohara, Fumiaki Motoyoshi, Osamu Uchida, Shohachiro Nakanishi</i> | |

Measure of Goodness for Spectral Sensitivity Functions of Color Imaging Devices	191
<i>Simon Schulz, Rolf-Rainer Grigat</i>	
Performance of Adaptive Nonlinear Predictor with Order Statistics in Impulsive Noise	197
<i>Hirobumi Tanaka, Yuichiroh Ohhashi, Tetsuya Shimamura</i>	
Building 2n Tree for Spatiotemporal Index of Moving Objects	205
<i>Huanzhuo Ye, Jianya Gong</i>	
Postural Sway Area of Elderly Subjects	213
<i>Darja Rugelj, France Sevsek</i>	
Person Identification Based on Iris Image Analysis	220
<i>Sanjay R. Ganorkar, Ashok A. Ghatol</i>	
Face Detection using Zernike Moments. Evaluation by Quantitative Measurement Criteria	226
<i>Mohammed Saaidia, Sylvie Lelandais, Vincent Vigneron, El-Mouldi Bedda</i>	
Real-Time Monitoring and Diagnosis in Dynamic Systems using Particle Filtering Methods	233
<i>Sareh Bahmanpour, Mahdi Bashooki, M.H. Refan</i>	
Selective Segmentation Based on a Hybrid Active Contour	241
<i>Juan Zapata, Ramon Ruiz</i>	
Construction of a Multi-Modal Database for the Evaluation of Person Authentication Systems Operating under Near Infrared Illumination	249
<i>Shuyan Zhao, Ralph Kricke, Rolf-Rainer Grigat</i>	
Image Enhancement with Minimum Mean Brightness Error via Automatic Histogram Dividing	255
<i>Nattapong Phanthuna, Fusak Cheevasuvit, Kobchai Dejhan, Sakreya Chitwong</i>	

A Parallel Equalizer with LMS Adaptation in Discrete Cosine Transform Domain 262
Mohammed H. Wondimagegnehu, Tetsuya Shimamura

Polynomial-based Filters in Bandpass Interpolation and Sampling Rate Conversion 269
Branko Markoski, Djordje Babic



EDITORIAL BOARD

EDITOR IN CHIEF

Prof. MIKHAEL WASFY, University of Central Florida, USA

ASSOCIATE EDITORS

PROF. STEPHEN WEINSTEIN, Columbia University, USA
PROF. DHARMA P. AGRAWAL, University of Cincinnati, USA
PROF. ZORAN BOJKOVIC, University of Belgrade, SERBIA
PROF. JOSE M.F. MOURA, Carnegie Mellon University, USA
PROF. VIJAYAKUMAR BHAGAVATULA (Fellow of OSA and SPIE), Carnegie Mellon University, USA
PROF. LIANG-GEE CHEN, National Taiwan University, TAIWAN
PROF. AHMED H. TEWFIK, University of Minnesota, USA
PROF. N.E. MASTORAKIS, Hellenic Naval Academy, GREECE
PROF. JENQ-NENG, Hwang University of WA, USA
PROF. AMIR HUSSAIN, University of Stirling, UK
PROF. GERGELY V. ZARUBA, The University of Texas at Arlington, USA
PROF. MOHAMMED GHANBARI, University of Essex, UK
PROF. C.-C. JAY KUO, University of Southern California, USA
PROF. AMAR MUKHERJEE, University of Central Florida, USA
PROF. ATHANASSIOS MANIKAS, Imperial College, University of London, UK
PROF. DENGSHENG ZHANG, Monash University, AUSTRALIA
PROF. XINGQUAN ZHU, University of Vermont, USA
PROF. SATNAM DLAY, University of Newcastle upon Tyne, UK
PROF. W.L. WOO, University of Newcastle upon Tyne, UK

TOPICS: Filter design and structures, Fast algorithms, Adaptive filters, Nonlinear Signals and Systems, Multirate filtering and filter banks, Signal reconstruction, Time-frequency analysis, Spectral estimation, Higher order spectrum analysis, Parameter estimation, Detection, Array signal processing, Statistical signal analysis, Signal and system modeling, Cyclostationary signal analysis, Speech production and perception, Speech analysis, Speech synthesis, Speech coding, Speech recognition, Speech enhancement and noise reduction, Active noise control, Active noise reduction, Echo cancellation, Psychoacoustics, Broadband audio coding, Signal processing for music, Binaural systems, Room acoustics, Digital transforms, HDTV, Multidimensional systems, Machine vision, Image coding, Image motion / sequence / video, Computed imaging, Geophysical and seismic processing, Image analysis and segmentation, Image filtering, restoration and enhancement, Image representation and modeling, Pattern recognition, Neural networks, Fuzzy Systems, Evolutionary computation, Expert systems, Multisensor Data Fusion, Architectures and VLSI hardware, Programmable signal processors, Algorithms and applications mappings, Design methodology and CAD tools, Languages and real time software, Real time system estimation, Optimization problems in signal processing, Radar, Sonar, Biomedical processing, Geophysical signal processing, Underwater signal processing, Remote sensing, Robotics, Astronomy, Classification, Crime on the Web, Security, Publicity, Privacy, Reputation, Frauds in Business Reputation, Satellite signals processing, Measure and Instrumentation

SUBSCRIPTION: The subscription rate for each journal is 100 Euros (per year) for individuals and 200 Euros (per year) for institutions or companies.

FORMAT OF THE PAPERS: <http://www.worldses.org/journals>

ISSN: 1790-5022

WSEAS E-LIBRARY: <http://www.wseas.org/data>

WSEAS CHAPTERS: <http://www.wseas.org/chapters>

Each paper of this issue was published after review by 3 independent reviewers

WSEAS Press: Athens, New York, Miami, Rio De Janeiro, Mexico City, Sofia, Taipei, Madrid

WSEAS Headquarters: Ag. I. Theologou 17-23, 15773, Zographou, Athens, Greece.
Tel: (+30) 210 7473313, **Fax:** (+30) 210 7473314

A New Algorithm for Seizure Detection Using Orthogonal Transformations

MARIA T. TITO¹, MALEK ADJOUADI¹, MERCEDES CABRERIZO¹, MELVIN AYALA¹,
ILKER YAYLALI², ARMANDO BARRETO¹, NAPHTALI RISHE¹

¹Department of Electrical and Computer Engineering, Florida International University
10555 W. Flagler Street, Miami FL 33174

²Department of Neurology, Miami Children's Hospital
3100 South West 62nd Avenue, Miami, FL 33155
UNITED STATES OF AMERICA

maria.tito@fiu.edu <http://www.cate.fiu.edu/>

Abstract: - Epilepsy is characterized by an unexpected and frequent electrical disturbance of the brain. Electrical activity in the brain has been studied for years in an attempt to detect and predict seizures; unfortunately, the incidence of an epileptic seizure is not predictable and its process is not fully understood yet. This study evaluates raw intracranial electroencephalographic recordings in the time prior and during a seizure with the intent to detect the seizure, but with anticipation in evaluating potential variations that could ultimately lead to seizure prediction. This paper focuses on the design of orthogonal operators based on the Walsh transform in order to detect the onset of epileptic seizures in EEG data. The merits of the algorithm are: (a) in elaborating a unique analysis scheme that scrutinizes EEG data through orthogonal operators designed to extract patterns that best characterize seizures in epileptogenic EEG data; and (b) in establishing mathematical derivations that provide not only quantitative measures through the designed operators, but also characterize and locate the event of a seizure. Visual inspection of the EEG recordings is needed for the detection of seizures; but this process is very time consuming, principally in the case of extensive recordings. Therefore, the extraction of parameters is extremely useful in order to find patterns indicative of epileptic seizure onset. In this study, twenty six EEG recordings from eight patients are processed and a set of parameters is extracted from non-overlapping scrolling windows of 1 second duration.

Key-Words: - EEG, Epilepsy, Seizure detection, Walsh Transform, Correlation Integral

1 Introduction

The Epilepsy Foundation of America estimates that 2.3 million people in the United States suffer from seizure disorders, which are grouped under the common name of epilepsy. For about 80 percent of those diagnosed with epilepsy, seizures can be controlled with some medicines.

In the area of epilepsy, where one of the most important goals is to detect seizures, the use of many measures has been practiced by various research groups for many years. This outcome is quite understandable given the challenge imposed by such a critical research endeavor. In the context of this study, many of the methods currently available in the specialized literature have been tested yielding different results. In an effort to conduct a detailed investigation on EEG data towards seizure detection, this study extracts a set of parameters from EEG data and analyzes its behavior in time, looking for patterns that would reveal that a seizure is developing in order

to detect it. All observations will be discussed and assessments will be made for future studies on seizure detection. These observations could also help in the endeavor of seizure prediction.

The detection process is designed such as to allow physicians to make evaluative assessments of epileptic seizures, which in turn will enable targeted treatment. The use of the Walsh transform in analyzing epileptogenic data, and the application of its associated mathematical derivations proposed show promise not only for detecting seizures, but also in characterizing them with quantitative measures. Processes and methods for the automated detection of seizures can be very useful, especially during long-term EEG monitoring sessions, and may serve as a support mechanism to the decisions made by EEG experts.

Given several important studies in the past decade, on epilepsy, a definite consensus was reached about the complex nature of EEG signals and how

limited is the collective knowledge we have gathered over the years.

Correlation integral is currently the most common basis on which the claim of chaotic dynamics has been made in biological systems [1, 2, and 3]. Correlation dimension oriented analysis applied to raw EEG and some variations including autocorrelation and entropy [4] are being directed with encouraging results, especially in the elusive problem of seizure detection, where promising results are claimed to be obtained [5].

One goal is to enable people with epilepsy to take less medicine than they currently do, and to be able to use it only when it is necessary. There are some cases in which medicine do not offer complete prevention of seizures; therefore. The quality of life of many epilepsy patients may be improved significantly if epileptic seizures can be successfully forecasted and clinical intervention, such as electrical stimulation or drug delivery, can then be used to suppress their emergence, or warn the patient of the forthcoming events. It is therefore extremely important to detect a seizure. Having a method for this end, it would be very helpful for the precise location of an epileptic focus and in this way a more targeted treatment could be addressed.

2 Methods

2.1 Data Collection

Subdural EEG recordings of eight epileptic children were analyzed. A total of twenty six different seizures were studied. Recording were performed during pre-surgical monitoring at the Miami's Children Hospital (MCH) using XLTEK Neuroworks Ver.3.0.5, equipment manufactured by Excel Tech Ltd. Ontario, Canada. This data was collected at 500 Hz sampling frequency and filtered to remove DC and high frequency components using a 0.1-70 Hz band-pass filter. EEG recordings were processed in the time prior to seizure.

The subjects involved were either under evaluation or undergoing surgery for alleviation of intractable epilepsy. The number of electrodes implanted differed from subject to subject. Up to 88 subdural electrodes were implanted on the surface of the cerebral cortex of each subject to record seizure activity.

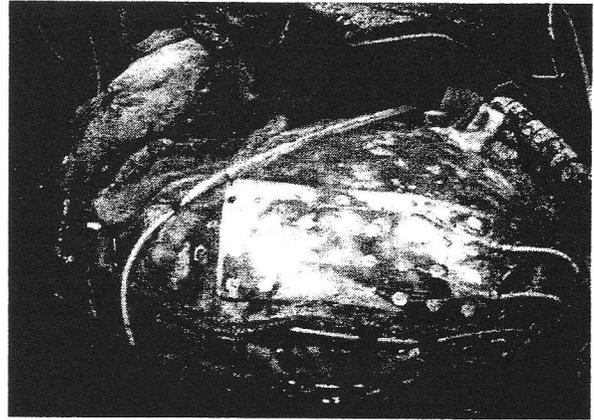


Fig. 1 Picture of a subdural grid used to record seizures.

Intracranial recordings of eight subjects were performed by using subdural strip or grid electrodes. In some cases, 4 contact depth electrodes were implanted. A typical illustration of placement of subdural electrodes is shown in Figure 1.

2.2 Data Analysis

2.2.1 Data Preprocessing

The primary objective was to analyze all electrodes; depending on the size of the file, the last ten or sixty minutes preceding a seizure and two minutes after seizure onset were analyzed. The size of some files of raw data was higher than one gigabyte because some files contained 1,800,000 samples; to that end, the software TextFileSplitter [6] was developed to split the files into readable pieces easier to handle. Most of the EEG recording text files cannot even be read by a personal computer by any visualization program (such as MS Excel or MS Notepad) because the amount of memory required to read the file significantly exceeds the available computer memory. TextFileSplitter was therefore developed to split such huge EEG recording text files into two separate files of less size such that they can be later read by a visualization editor.

Data sets used are from 8 subjects (six males, two females; age range, 3-17 years) with epilepsy in whom subdural strips and/or grid electrodes were implanted. Each subject has a different number of EEG files; the relevant information for all patients is given in Table I., including the time range of the data files. For subjects 1-4, all files extend from 10

min
it. T
min
onse

Su

2.2.

Pre
ther
that
leac
dev
pur
cate
con
and
not
cate
vist

cate
onl
wit
be 1

cert
be
illu
the
cou
visi
imr
seiz
line



record

minutes prior to seizure onset and two minutes after it. The time interval for the other subjects was a 62 minute time range, (60 minutes prior to seizure onset).

Table 1 Subjects' information

Subject	Age (years)	Sex	Number of files	Time range for each file (minutes)
1	10	Male	5	12
2	16	Male	2	12
3	3	Female	3	12
4	14	Male	2	12
5	17	Male	2	62
6	9	Male	3	62
7	11	Female	3	62
8	14	Male	6	62

2.2.2 Electrode Categorization

Previous studies on related matters [7] reveal that there is a tendency on the behavior of the electrodes that lead to seizure which is not given in those not leading to seizure. A portion of this research was devoted to confirm these previous findings. For this purpose, each set of electrodes was divided into three categories; those that led to seizure, those that contained interictal spikes and did not lead to seizure and those that did not contain interictal spikes and did not lead to seizure. To identify the different categories of electrodes; neurologists performed a visual inspection of the recorded data.

The analysis of data depending on these categories has been performed in this study with the only purpose of confirming observations, but not with the intention of searching for patterns that could be used for seizure prediction.

It was intended at the beginning to only use a certain group of electrodes so a better detection could be performed more accurately, however, results as illustrated in Figures 2 and 3, confirm that applying the Walsh operators to all electrodes, the detection could be performed more accurately. A better visualization could be observed based in the immediate change that occurs at the time of the seizure onset, which is represented by a vertical red line in the plots.

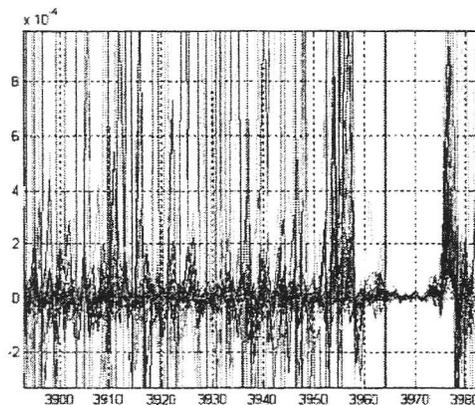


Fig. 2 Walsh first operator for all electrodes.

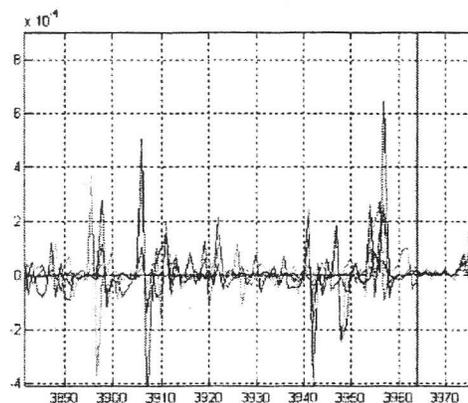


Fig. 3 Walsh first operator for electrodes that lead to seizure.

2.2.3 Parameter Extraction

Due to the high volume of information contained in the EEG raw data files, size reduction was necessary. Data files were segmented in one second time windows and parameters were extracted for all windows. The size of the set was thus reduced to a small number of parameters that are representative of the EEG. This set of parameters was then used for the study.

The following three parameters were considered:

- F_1 : correlation integral.
- F_2 : mobility
- F_3 : complexity

ects were
electrodes.
odes were
cement of

electrodes;
en or sixty
nutes after
me files of
ause some
it end, the
ed to split
le. Most of
e read by a
1 program
ecause the
the file
computer
veloped to
s into two
an be later

males, two
pilepsy in
odes were
number of
patients is
of the data
1 from 10

There are other interesting features used in EEG processing, such as the Lyapunov exponent which is a complex mathematical quantity in which the amount of chaos in the brain is measured [8]. But they were not included in the analysis because they are computationally intensive. For compensation, the correlation integral was included in the list, which is a non linear feature related to the Lyapunov exponent.

Mobility and complexity are known as Hjorth parameters [9].

Mobility M_x , is computed as the square root of the ratio of the activity of the first derivative of the signal $A_{x'}$ to the activity of the original signal A_x :

$$M_x = \sqrt{\frac{A_{x'}}{A_x}} = \frac{\sigma_{x'}}{\sigma_x} \quad (1)$$

where x' represents the first derivative of the input EEG signal x .

Mobility gives a measure of deviation of the voltage changes with respect to deviation of the EEG voltage amplitude. Complexity is defined as the ratio of the mobility of the first derivative of the signal to the mobility of the signal itself:

$$C = \frac{M_{x'}}{M_x} = \frac{\sigma_{x''}/\sigma_{x'}}{\sigma_{x'}/\sigma_x} \quad (2)$$

where x'' stands for the second derivative of the input EEG signal.

The complexity of a sinusoidal wave is unity; other waveforms have complexity values increasing with the extent of variations present in them. Complexity represents the deviation from the sine shape of the EEG signal.

Correlation integral is mostly used to detect randomness in data. It is given by:

$$C_{m,r} = C_r = \frac{1}{N} \sum_{k=1}^N \left[\frac{1}{N} \sum_{i=1}^N \theta(r - |x_i - x_k|) \right] \quad (3)$$

where N is the total number of samples in the EEG data segment inside the sliding window, $\theta(u)$ is the step function, and $|x_i - x_k|$ is the distance between x_i and x_k . The vector x_i used in the correlation integral is a point in the embedded phase constructed from the input EEG signal as a single time series according to the following:

$$X_i = (x_i, x_i + \tau, x_i + 2\tau, \dots, x_i + (m-1)\tau) \quad (4)$$

where m is the so called embedding dimension and τ is a delay. The correlation integral can be interpreted as the number of point pairs inside a hyper-ball of radius r .

2.2.4 Detection using Walsh Transform

The interesting aspect in this study is that Walsh operators satisfy the important concept of orthogonality and yet an analogy to discrete mathematical derivatives can be generalized in terms of their functional behavior [10, 11, and 12].

For the ordered Walsh kernel matrix, the Walsh operator ω_N^r of r^{th} order and length N is defined based on the sequency value (number of sign changes in its ± 1 elements) and the dimension N considered. The order r is given by the sequency of the operator, and refers to the type of differences (derivatives) used between sample points [13]. The dimension N ($N=2n$) refers to the width of the operator, function of the number of points considered. Considering the digitized input signal, $f(t)$, the Walsh transform defined by W_N^r is given by the convolution ($*$) of ω_N^r with $f(t)$ as:

$$W_N^r = \omega_N^r * f(t) \quad (5)$$

The Walsh operator of 1st order and length 2, ω_2^1 , is functionally equal to the 1st derivative, d^1 :

$$\omega_2^1 = [1 \ -1] = d^1 = \frac{\partial}{\partial x} \quad (6)$$

The Walsh operator of 2nd order and length 4, ω_4^2 , is functionally equivalent to the 2nd derivative, d^2 :

$$\omega_4^2 = [1 \ -1 \ -1 \ 1] \cong d^2 = \frac{\partial^2}{\partial x^2} = [1 \ -2 \ 1] \quad (7)$$

For wider intervals of observation, the algorithm developed takes the results at different scales (resolutions) and adds them together to detect all potential transitions under different scaling. This is expressed mathematically as:

(4)

$$W^r = W_4^r + W_8^r + W_{16}^r \text{ for } r = 1, 2 \quad (8)$$

tion and r
nterpreted
er-ball of

In other words, sharpness/steepness of the signal identified in any of W_4^r , W_8^r , or W_{16}^r , ($r = 1, 2$), resulting in high-amplitude peaks, should yield a steep and sharp signal in W^r .

at Walsh
ncept of
, discrete
d in terms

With the analogy drawn earlier from mathematical derivatives, can be redefined to use only Walsh operators in a similar functional outcome and yet in an integrated approach to preserve orthogonality as follows:

the Walsh

$$W_2^r \cdot W^r = W_2^r \cdot [W_4^r + W_8^r + W_{16}^r]; r = 1$$

is defined

$$W_{2+2r}^r \cdot W^r = W_{2+2r}^r \cdot [W_4^r + W_8^r + W_{16}^r]; r = 2 \quad (9)$$

in changes

onsidered.

operator,

erivatives)

ension N

unction of

dering the

transform

(*) of ω_N^r

In this equation (9), recall that W_2^1 is functionally equivalent to the first derivative and that W_4^2 is functionally equivalent to the second derivative.

3 Clinical Results

(5)

After computing each subject's EEG parameters, the first and second operators of the Walsh Transform using the different resolutions explained above were convolved with the three parameters extracted from the EEG. For both operators, the results using the correlation integral as the parameter were the best since the amplitude at the time of the onset was considerably reduced. An abrupt change is evidently observed in the signal at the advent of a seizure and during the seizure itself. Also, these results are less noisy compared to the Correlation Integral by itself, which is displayed in Figure 4. Our system successfully detected 21 seizures out of 26, yielding a sensitivity of 81%, which is acceptable taking into consideration the total number of seizures available.

nd length

erivative,

(6)

4, ω_4^2 , is

, d^2 :

-2 1] (7)

tion, the

t different

together to

different

ly as:

Several sample outputs of our seizure detection algorithm using first and second operators are displayed in Figures 5 and 6 respectively. The red vertical line represents the seizure onset.

As it can be observed from Figures 7 and 8 using Mobility and Complexity as our parameters, the change in magnitude at the time of the onset is not as

high when compare to the change using the correlation integral.

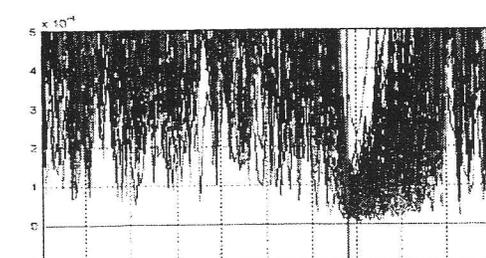
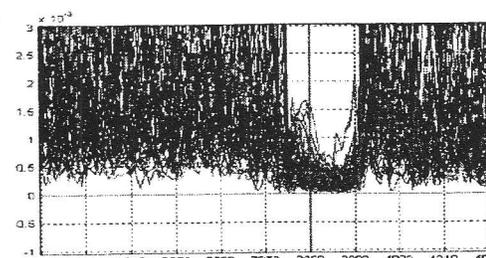
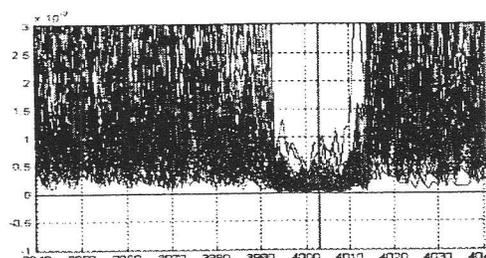
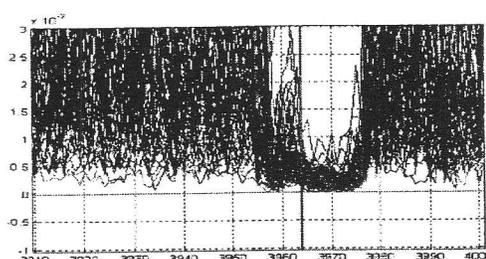
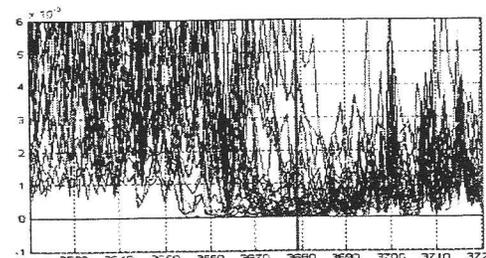


Fig. 4 Correlation Integral versus time.

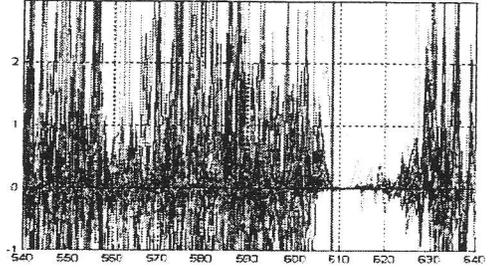
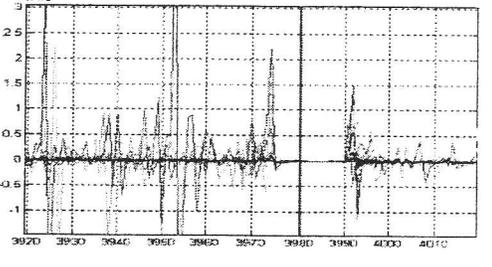
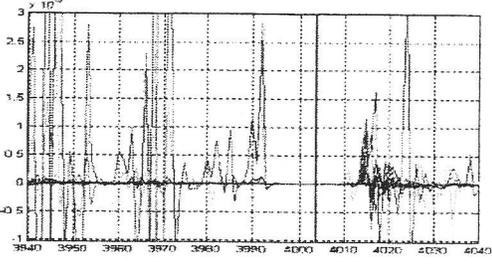
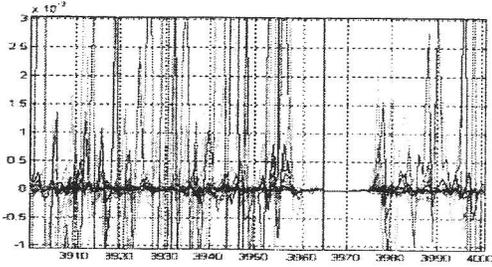
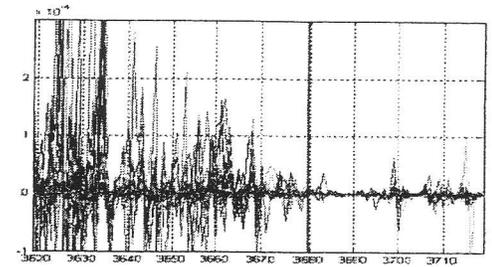


Fig. 5 Walsh first operator to correlation integral versus time.

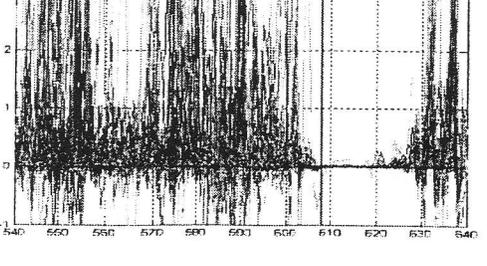
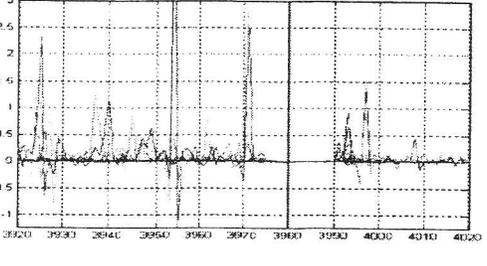
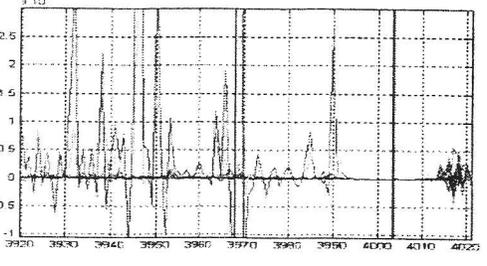
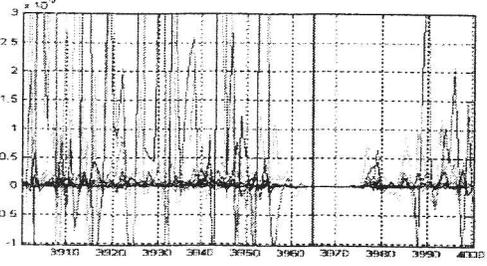
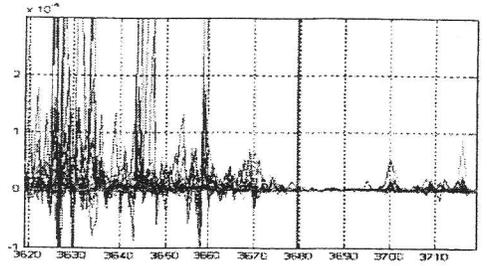


Fig. 6 Walsh second operator to correlation integral versus time.

Fi
 4 C
 For
 char
 using
 Wal
 obser
 experi
 char
 our
 the
 capa
 com
 dete
 acce
 the 1
 oper

- [7] M. Cabrerizo, M. Adjouadi, M. Ayala, M. Tito, Pattern extraction in interictal EEG recordings towards detection of electrodes leading to seizures, *Biomedical Sciences Instrumentation*, 42 (ISA Vol. 464) 2006, pp.243-248.
- [8] J.C. Sackellares, P.M. Pardalos, L.D. Iasemidis, W. Chaovalitwongse, and D.S. Shiau, Optimization of spatio-temporal pattern processing for seizure warning and prediction, U.S. Patent application filed August 2004 (Attorney Docket No. 028724-150).
- [9] B. Hjorth,(1970), EEG analysis based on time series properties, *Electroencephalo-graphyand Clinical Neurophysiology*. Vol.29, 1970, pp.306-310.
- [10] Adjouadi M., Cabrerizo M., Ayala M., Sanchez D., Jayakar P., Yaylali I., & Barreto A., A new approach to the analysis of epileptogenic data using statistically independent operators, *Journal of Clinical Neurophysiology*, Vol.22, No.1, 2005, pp.53-64.
- [11]Adjouadi M., Cabrerizo M., Ayala M., Sanchez D., Jayakar P., Yaylali I., & Barreto A Interictal spike detection using the Walsh transform, *IEEE Transactions on Biomedical Engineering*, Vol.51, No.5, May 2004, pp.868-873.
- [12]Adjouadi M., Cabrerizo M., Ayala M., "Seizing lesions in 3-D", *IEEE Potentials*, Vol. 24, No.5, 2006, pp. 11-17.
- [13]Cabrerizo M., Adjouadi M., Ayala M., A. Sesin, "3D Epileptic Foci Detection Using an Integrated Neuro-Imaging Approach", *WSEAS Transactions on Information Science and Applications*, Vol.2, No.7, 2005, pp.987-995.

O]

Ha

{m

Abs
stan
scal
resu
tain
crea
sho
Gau
Cor
for :

Key
equ

1

Alth
sion
lish
ima
segr
ticu
inst
nois

is de
tain:
The
the
fron
enh
the
true
ized
mid
inste

ular
prio
cons